


# UpadIV2-S


500mm×500mm Indoor

Creative Curving LED Display Unit

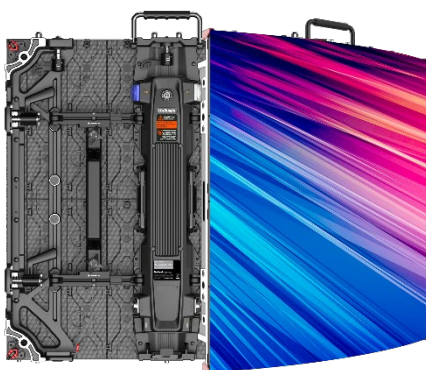

Product features:

1. Support  $\pm 40^\circ$ .
2. Minimum 1.4m diameter cylinder, only 9 cabinets.
3. Perfect 'S' shape.

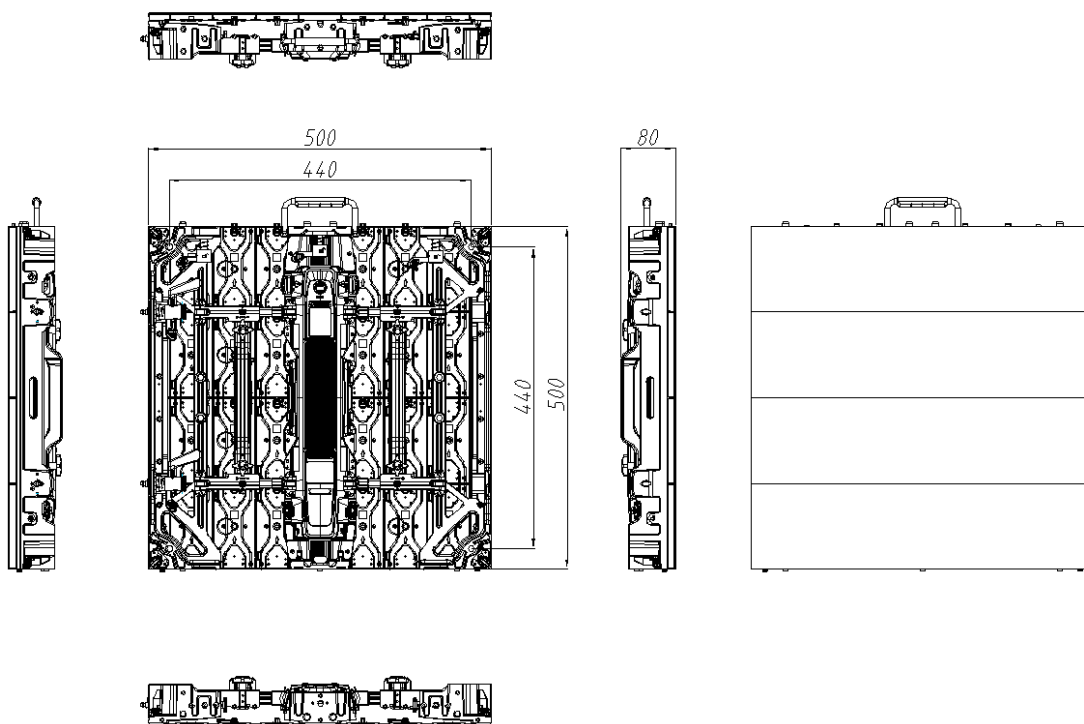

## Main Technical Specifications:

Parameter	Value
Pixel Pitch	2.6mm
LED Type	3-in-1 Black SMD
Brightness	1200 cd/m <sup>2</sup>
Pixel Density	147,456 pixels/m <sup>2</sup>
Pixels Per Panel	192×192 pixels
Module Size	W500mm×H125mm
Panel Size	W500mm×H500mm×D80mm
Weight	7.7 kg/panel
Maintenance	Rear
Ingress Protection	IP30
Curve	(Convex) -40°~+40°(Concave)
Aspect Ratio	1:1
Panel Area	0.25 m <sup>2</sup>
Recommended Viewing Distance	≥2.6m
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K-9,300K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	6,000:1
Input Power <Max>	150 W/panel
Input Power <Typical>	50 W/panel
Input Voltage	100~240 VAC
Processing Depth	16 bit
Scan Method	1/16
Refresh Rate	3840@60 Hz
Video Frame Rate	50/60 Hz
Input Power Frequency	50~60 Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10℃~+45℃/10~80%RH
Storage Temperature/Humidity	-20℃~+55℃/10~80%RH
Standard Mounting Configuration	Hanging, Stacking

- Note:
1. Specifications are for reference based on normal temperature conditions(25℃).
  2. Power consumption tolerance: ±15%, according to the installation site environment.
  3. The deviation of cabinet weight is about ±5% duo to different measurements.
  4. Specifications are for reference only and are subject to change without notice.