


# Upad Series

## UpadIV1.9 Pro

### Product features:

- Light weight, easy handling.
- Low loss.
- Brilliant Visual Performance.
- Multiple scenarios, creative display.

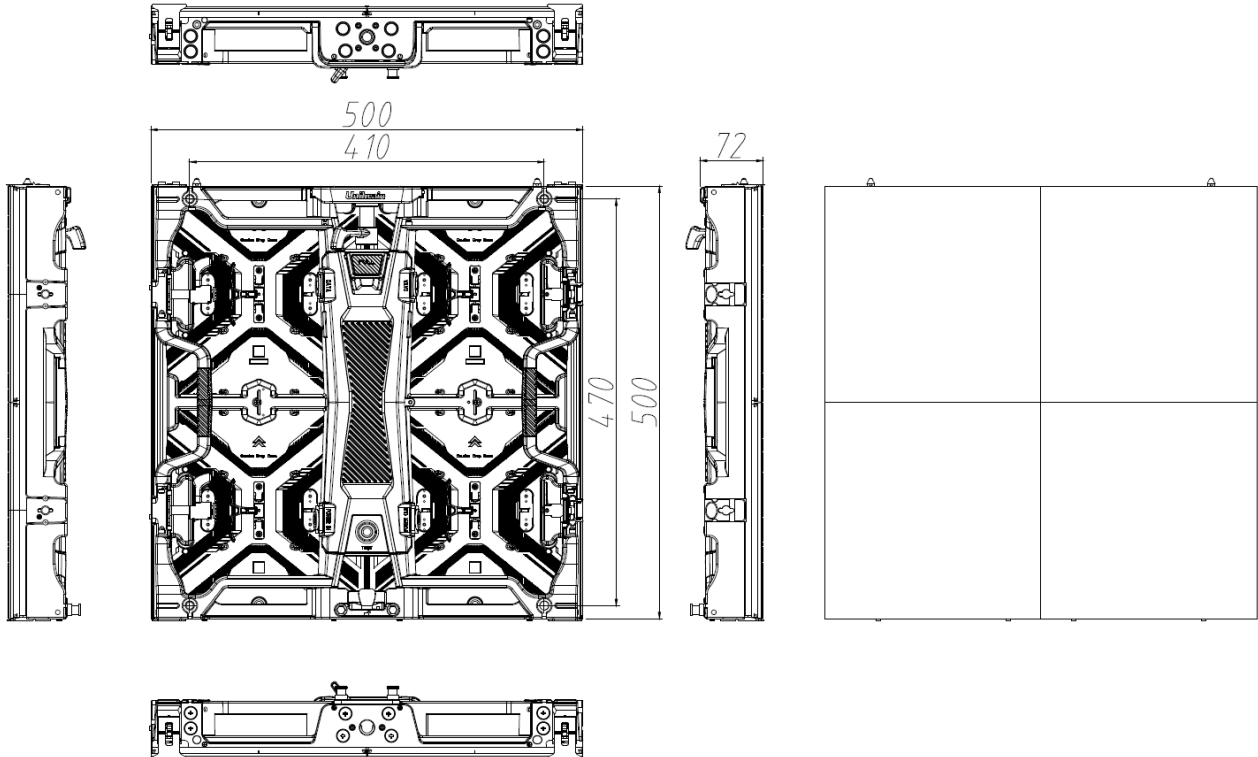

## Main Technical Specifications:

| Parameter                    | UpadIV1.9 Pro                         |
|------------------------------|---------------------------------------|
| Pixel Pitch                  | 1.9mm                                 |
| LED Type                     | 3-in-1 Black SMD                      |
| Brightness                   | 1,500 cd/m <sup>2</sup>               |
| Pixel Density                | 262,144 pixels/m <sup>2</sup>         |
| Pixels Per Panel             | 256×256 pixels                        |
| Module Size                  | W250mm×H250mm                         |
| Panel Size                   | W500mm×H500mm×D72mm                   |
| Weight                       | 7.6 kg/panel                          |
| Maintenance                  | Front & Rear                          |
| Ingress Protection           | IP30                                  |
| Curve                        | (Convex) -5°~+10°(Concave) (Optional) |
| Aspect Ratio                 | 1:1                                   |
| Panel Area                   | 0.25 m <sup>2</sup>                   |
| Recommended Viewing Distance | ≥1.9m                                 |
| Environment                  | Indoor                                |
| Material                     | Die-cast Magnesium                    |
| Calibration                  | Support Brightness and Chroma         |
| Brightness Control           | Manual/Automatic                      |
| Color Temperature            | 2,000K~9,300K Adjustable              |
| Horizontal Viewing Angle     | 160°                                  |
| Vertical Viewing Angle       | 160°                                  |
| Contrast Ratio               | 10,000:1                              |
| Operating System             | Nova/Brompton                         |
| Input Power <Max>            | 150 W/panel                           |
| Input Power <Typical>        | 50 W/panel                            |
| Input Voltage                | 100~240 VAC                           |

|                                 |                          |
|---------------------------------|--------------------------|
| Processing Depth                | 16 bit                   |
| Scan Method                     | 1/8                      |
| Refresh Rate                    | 15,360@60 Hz             |
| Color Gamut                     | ≥98% DCI-P3              |
| Video Frame Rate                | 23.5~240 Hz              |
| Input Power Frequency           | 50~60 Hz                 |
| LED Life Time                   | 100,000 Hours            |
| Operating Temperature/Humidity  | -10°C~+45°C/10~80%RH     |
| Storage Temperature/Humidity    | -20°C~+50°C/10~60%RH     |
| Standard Mounting Configuration | Hanging, Stacking        |
| Certification                   | TUV-CE/UL/CB/FCC/IC/RoHS |

**Note:**

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment in Unilumin's internal laboratory, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.