

# Upanel S (CCF)




## Intelligent Front Access 16:9 LED

### Display Unit Upanel1.2S

#### Product features:

- Common cathode energy saving design
- Intelligent front maintenance – software maintenance and smart bracelet induction maintenance
- HDR highly dynamic display\*
- Revolutionary separate structure of cabinet and module
- Seamless splicing between cabinets and between cabinet and module
- Highly precise intelligent module

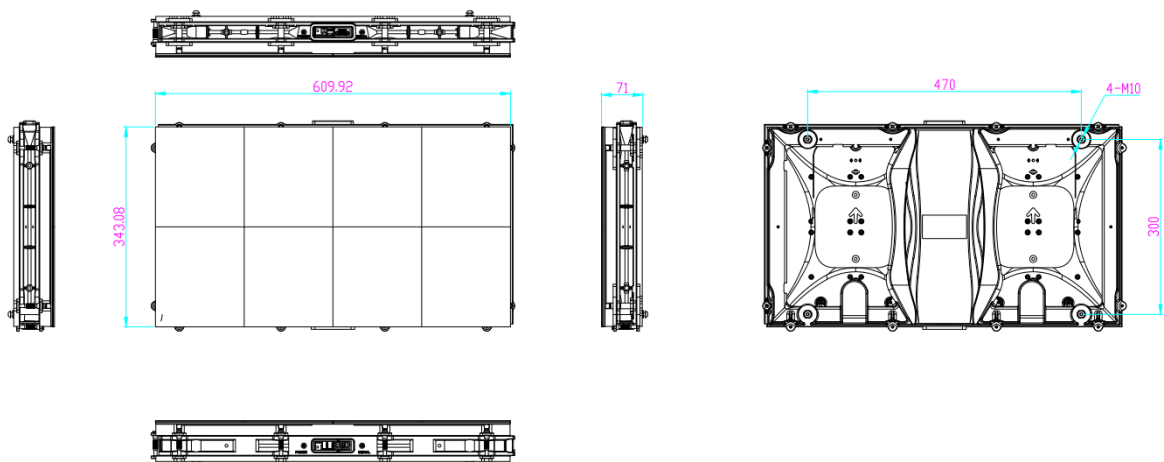

Specification	Upanel1.2S (CCF)	
Pixel Pitch	1.27mm	
LED Type	3-in-1 SMD	
Pixel Density	62,0001pixels/m <sup>2</sup>	
Brightness	600cd/m <sup>2</sup>	1500cd/m <sup>2</sup>
Contrast Ratio	4500:1	11000:1
Input Power <Max>	55W/panel	105W/panel
Input Power <Typical>	18W/panel	32W/panel
Pixels Per Panel	480*270pixels	
Module Size	304.96mm×343.08mm	
Panel Size	609.92mm×343.08mm×71mm	
Weight	7kg/panel	
Maintenance	Front	
Ingress Protection	Rear IP30	
Curve	Customized according to customers' needs	
Panel Area	0.209 m <sup>2</sup>	
Planeness	≤0.15mm	
Recommended Viewing Distance	≥1.2m	
Environment	indoor	
Material	Die-cast Aluminum	
Calibration	Support brightness and chroma	
Brightness Control	Manual/Automatic	
Color Temperature	2,000K~9,500K Adjustable	
Horizontal Viewing Angle	165°	
Vertical Viewing Angle	150°	
Input Voltage	100~240VAC	
Processing Depth	14+6bit	
Refresh Rate	7680Hz	3840Hz

Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80%RH
Storage Temperature/Humidity	-20°C~+55°C/10~85%RH
Power Status	Diagnostic LEDs
Optional Mounting Configuration	Wall-mounting
Certification	CE/CB/FCC/IC/ROHS/ CCC/UL

Note:

- 1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance color, size) may be slightly different, please refer to the actual product.
- 2.The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
- 3.Different configurations can achieve different refresh rates.