


# Uslim II

## Uslim II 2.5 creative semi-outdoor LED display



Product features:

1. Ultrathin and lightweight aluminum die casting structure with thickness of 39.6 mm
2. Three standard sizes of cabinets. Four sizes option.
3. 100% Front and 100% Rear Maintenance

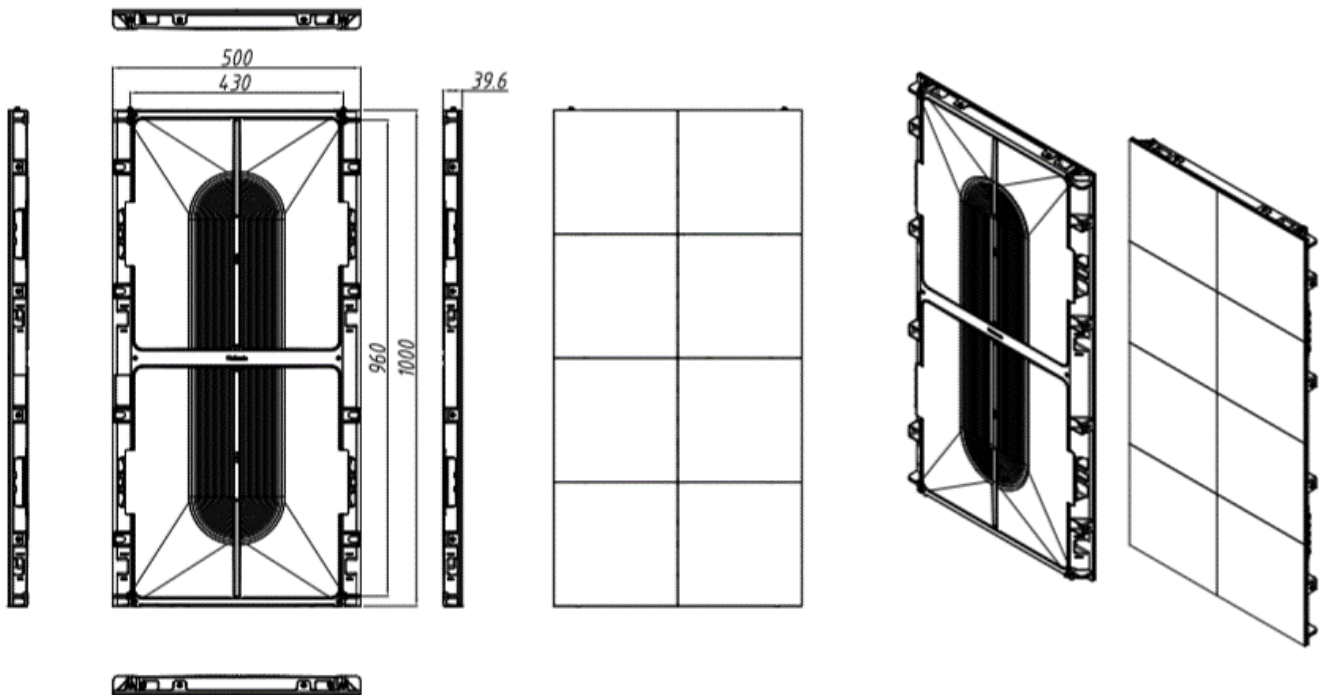

## Main Technical Specifications:

Parameter	Value
Pixel Pitch	2.5mm
LED Type	SMD 1921
Brightness	3500cd/m <sup>2</sup>
Pixel Density	160,000pixels/m <sup>2</sup>
Pixels Per Panel	200*100/200/400 pixels
Module Size	250mm×250mm
Panel Size	500mm×250/500/1000mm×39.6mm
Weight	3.2/6.4/10.5kg/panel
Maintenance	Front and Rear
Ingress Protection	Front IP40/Rear IP10 Optional: Rear IP30
Panel Area	0.125/0.25/0.5m <sup>2</sup>
Planeness	≤0.2mm
Recommended Viewing Distance	≥2.5m
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Color Temperature	2,000K~9,300K Adjustable
Horizontal Viewing Angle	155°
Vertical Viewing Angle	155°
Contrast Ratio	5000:1
Input Power <Max>	420W/m <sup>2</sup> with ±10% tolerance
Input Power <Typical>	140W/m <sup>2</sup> with ±10% tolerance
Input Voltage	100~240VAC
Processing Depth	14bit
Refresh Rate	3840~7680Hz
Video Frame Rate	60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10℃~+45℃/10~80%RH
Storage Temperature/Humidity	-20℃~+55℃/10~85%RH
Standard Mounting Configuration	Fixed/Stacking/Hanging
Optional Mounting Configuration	Concave and Convex, Round shape, Corner Shape

**Note:**

- 1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
- 2.The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.